

4


3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2013-1-2

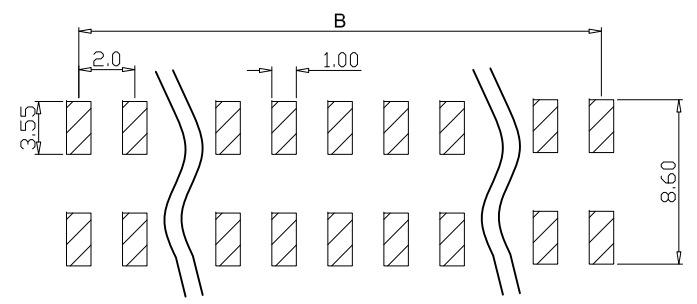

PCB Layout(Top View)

MATERIAL AND FINISH


Housing: Nylon-9T(UL94V-0), Black.  
Terminal: BRASS, Gold Plating.

ELECTRICAL CHARACTERISTICS

Current Rating: 1.0AMP Max  
Dielectric Withstand Voltage:  
800V AC RMS for 60Seconds  
Insulation Resistne: 1000M Ohms Min at 500V DC

MECHANICAL CHARACTERISTICS

Operating Temperature: -55°C~+105°C

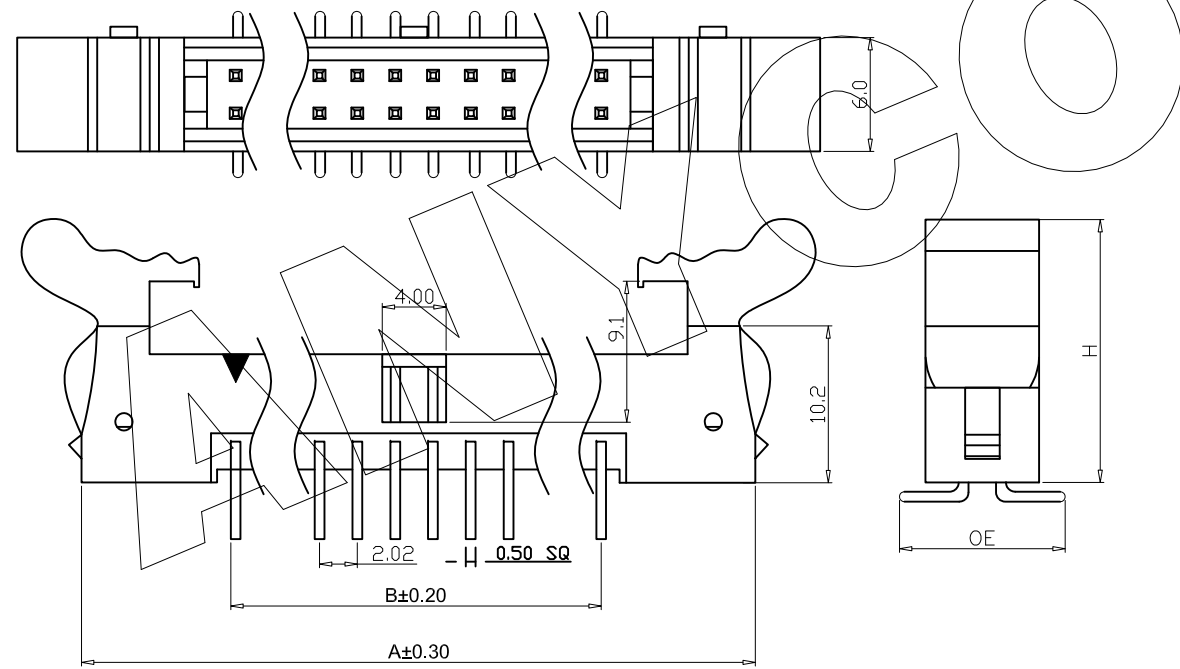

No. of Positions	DIM"A"	DIM"B"
10	25.80	8.00
12	27.80	10.00
14	29.80	12.00
16	31.80	14.00
20	35.80	18.00
22	37.80	20.00
24	39.80	22.00
26	41.80	24.00
30	45.80	28.00
32	47.80	30.00
34	49.80	32.00
40	55.80	38.00
44	59.80	42.00
48	63.80	46.00
50	65.80	48.00

<b>BHJ</b> J PH2.0 勾勾牛角	<b>XXX</b> Pin位数 No. of Positions XXX Positions	<b>12</b> 产品型号 12 单塑双排	<b>S</b> 产品折弯类型 S SMT	<b>XX</b> 端子电镀 00 无 G0 0.8μ"Au G1 1μ"Au G2 2μ"Au G3 3μ"Au G4 5μ"Au G5 8μ"Au G6 10μ"Au G7 15μ"Au G8 30μ"Au	<b>X</b> 材质 A PBT C PA-6T D LCP F PA9T	<b>X</b> 颜色 B 黑色 W 白色 L 蓝色 G 绿色 Y 黄色 R 红色 N 本色	<b>X</b> 特征流水码	<b>S001</b> 针长/特征流水码 S001
----------------------------	--	------------------------------	-----------------------------	--	---	--	-------------------	---------------------------------

**ANYCONN®** 东莞市恩康电子有限公司  
www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE ANGLE ±5° X.XXX ±0.10 X.XX ±0.20 X.X ±0.30 X. ±0.50	PROJECTON		TITLE: 2.0mm Pitch Double Row Right Angle Ejector Header
	DATE :	2013-1-2	PART NO: BHJXXX12SXXXBXS001
	DRAWN :	DMQ	DRAWING NO:
	CHECKED :		REV: A0
APPROVED :		UNIT: mm	SCALE: 3:1
			SIZE: A4

4

3

2

1