

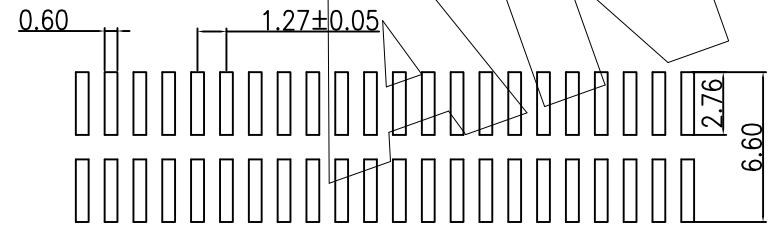
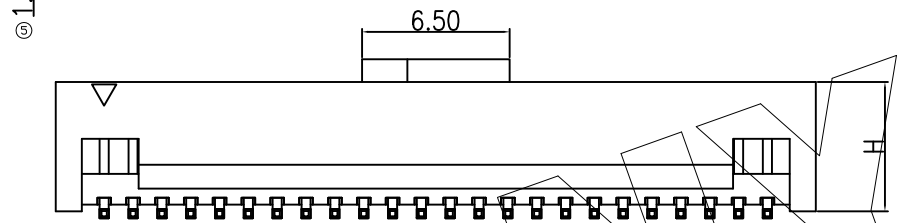


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-06-10

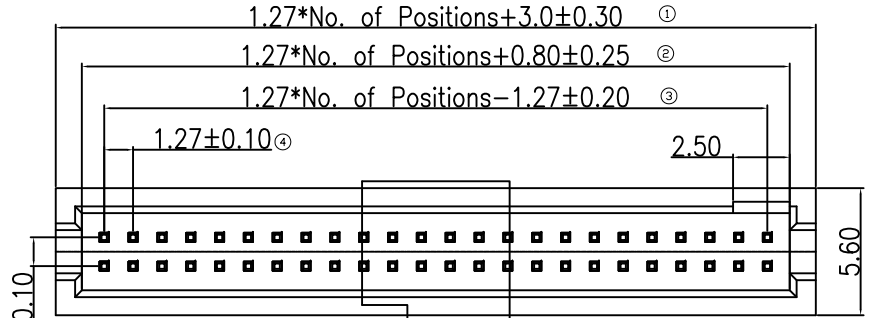

P.C.B LAYOUT



Technical Data

Material:
 Contact Material: Brass
 Insulator Material: Black Polyester UL94V-0
 Standard: PA9T+30%G.F
Electrical:
 Current rating: 1.0Amps/contact max.
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Withstanding Voltage: 500V AC/minute
Mechanical:
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10s max.
 Packing: Tube

BHI	XXX	12	S	XX	X	B	N	XXXX
Product Descriptions BHI H=5.70	No. of Positions XXX Poles	Product Type 12 单塑双排	Angle options S SMT	Pin Plating G1 Gold 1u" SN Tin Plated S8 半金锡30u"	Insulator Material A PBT B PA66 C PA6T D LCP F PA9T	Color B Black	N No post W With post	PIN length

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE:
ANGLE $\pm 5^\circ$	DATE :	2015-06-10	1.27mm Pitch Double Row SMT Box Header L6.50
X.XXX ± 0.10	DRAWN :	Songjun	PART NO: BH1XXX12SXXCBNS002
X.XX ± 0.20	CHECKED :		DRAWING NO:
X.X ± 0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ± 0.50			