


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-02-10

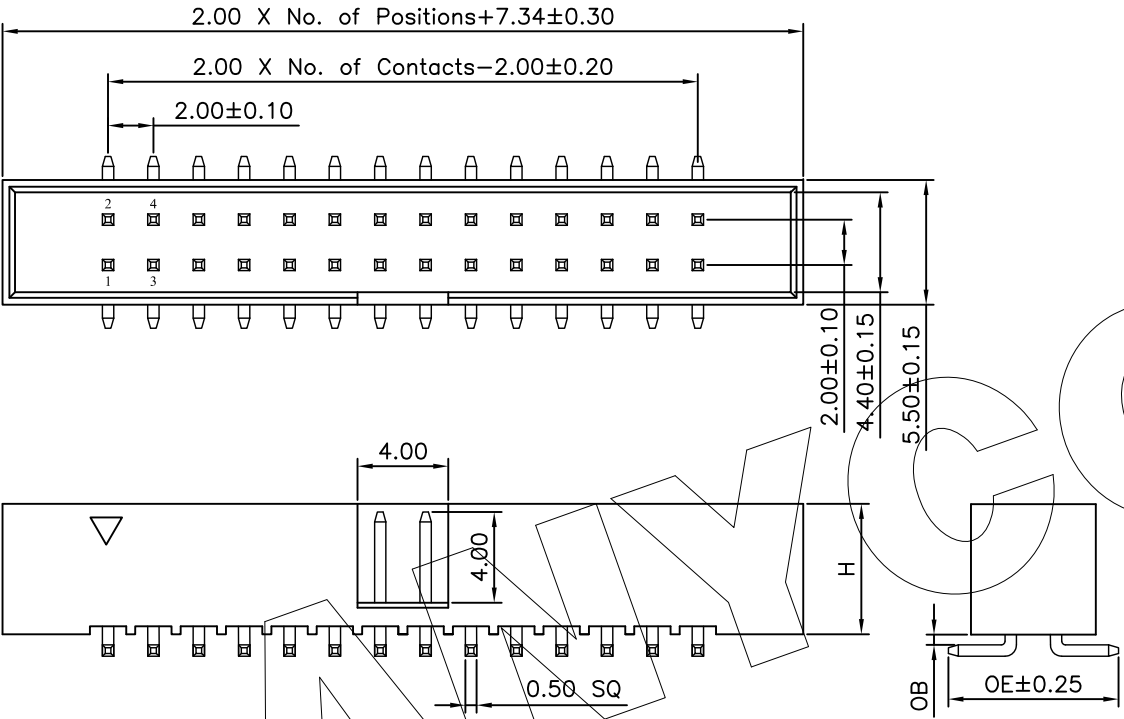


Technical Data

Material:
 Contact Material: Brass
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:
 Current rating: 1.5Amps/contact max.
 Contact resistance: $\leq 20\text{m}\Omega$ /contact
 Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$
 Withstanding Voltage: 450V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to $+105^\circ\text{C}$
 Tin plated: -40°C to $+105^\circ\text{C}$
 Soldering temperature: $+260^\circ\text{C}$, 10s max.

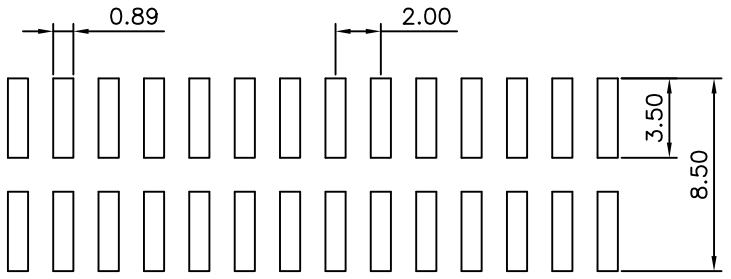

P.C.B LAYOUT

ANYCONN® 东莞市恩康电子有限公司				
www.enkcom.com		DONGGUAN ANYCONN ELECTRONICS CO.,LTD		
TOLERANCE	PROJECTON		TITLE: 2.00mm Pitch Double Row SMT Box Header L8.60	
ANGLE $\pm 5^\circ$	DATE :	2012-02-10	PART NO: BHCDXXSCG1BNSXXX	
X.XXX ± 0.10	DRAWN :	Jason	DRAWING NO:	
X.XX ± 0.20	CHECKED :		REV: A0	UNIT: mm
X.X ± 0.30	APPROVED :		SCALE: 3:1	SIZE: A4
X. ± 0.50				