

4



3

2


1

REVISION DATA

| REV | DESCRIPTION | DATE |
|-----|-------------|------------|
| A0 | NEW DRAWING | 2012-02-21 |

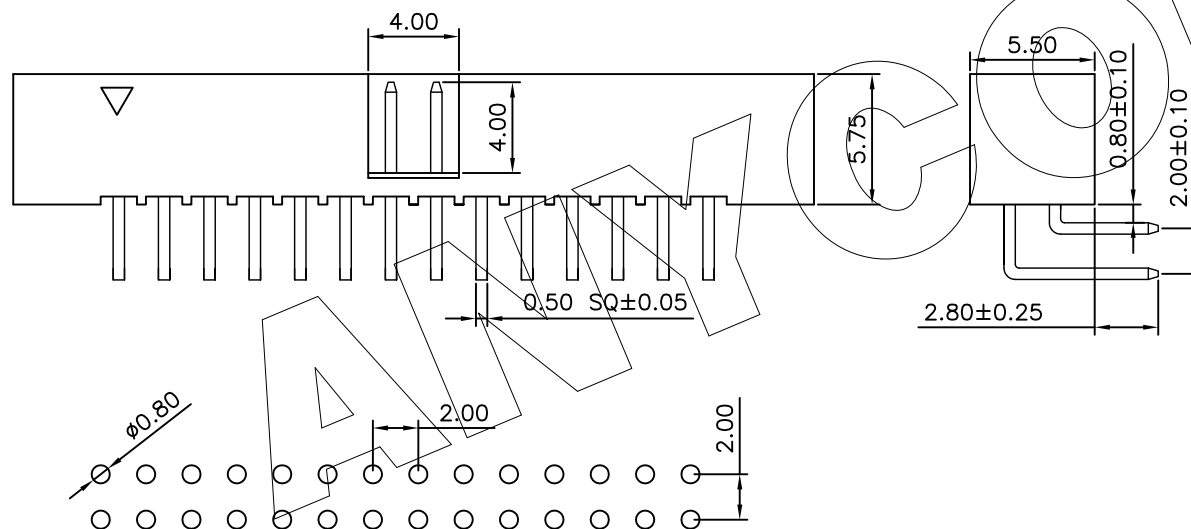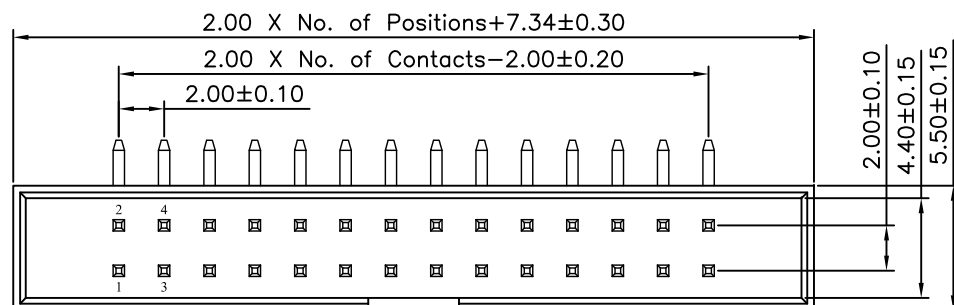

P.C.B LAYOUT

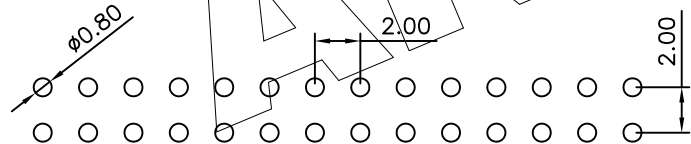

Technical Data

Material:

Contact Material: Brass

Contact plating: Gold Flash

Insulator Material: Black Polyester UL94V-0

Standard: PA46 or PA6T+30%G.F

Electrical:

Current rating: 1.5Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega$ /contactInsulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Withstanding Voltage: 450V AC/minute

Mechanical:

Operating temperatures: Gold Plated: -55°C to $+105^\circ\text{C}$ Tin plated: -40°C to $+105^\circ\text{C}$ Soldering temperature: $+260^\circ\text{C}$, 10s max.

BHC

XXX

12

R

XX

X

B

N

R003

Pin位数
No. of Positions
XXX Positions产品型号
12 单塑双排产品折弯类型
R 90°端子电镀
00 无
G0 0.8 μ Au
G1 1 μ Au
SN Tin 120u"材质
A PBT
C PA-6T
D LCP
E PA46
F PA9T颜色
B 黑色
W 白色
L 蓝色
G 绿色
Y 黄色
R 红色
N 本色针长特征流水码
R003 L=10.75/14.75

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

| TOLERANCE | PROJECTON | TITLE: |
|---------------------|-------------------|--|
| ANGLE $\pm 5^\circ$ | DATE : 2012-02-21 | 2.00mm Pitch Double Row Angle Box Header L10.75/14.75 |
| X.XXX ± 0.10 | DRAWN : Sammo | PART NO: BHCXXX12RXXXBNR003 |
| X.XX ± 0.20 | CHECKED : | DRAWING NO: EP-BHC-004 |
| X.X ± 0.30 | APPROVED : | REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4 |
| X. ± 0.50 | | |

4

3

2

1