

4

3

2


1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2013-02-23

2.54 X No. of Positions+7.62±0.30

2.54 X No. of Contacts/2-2.54±0.20

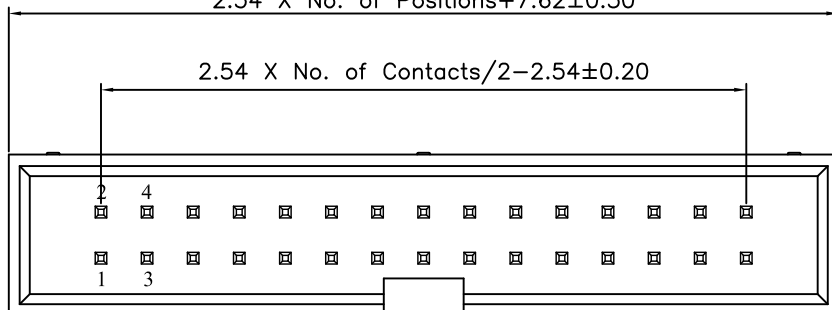

Technical Data

Material:

Contact Material: Brass

Insulator Material: Black Polyester UL94V-0

Standard: PBT+30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V



Withstanding Voltage: 550V AC/minute

Mechanical:

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +240°C, 10s max.

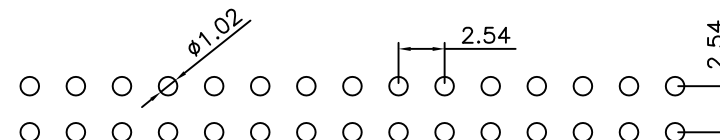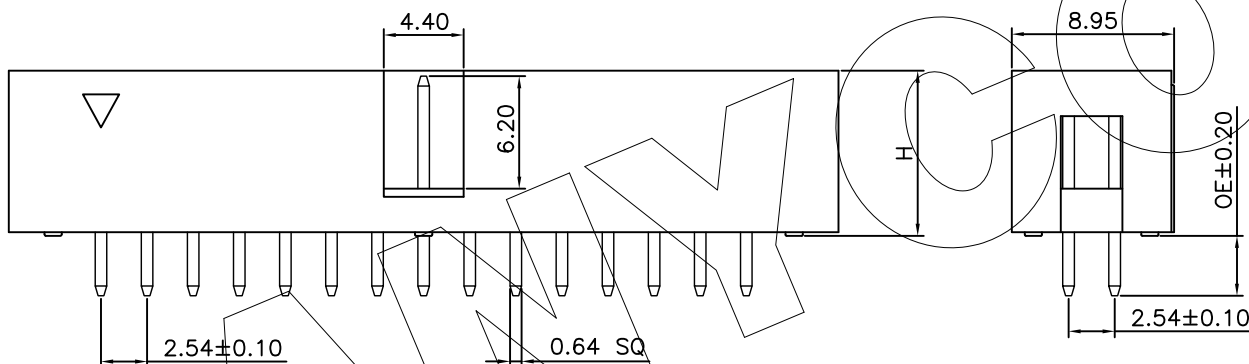

P.C.B LAYOUT

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :		2.54mm Pitch Double Row Straight Box Header L12.1
X.XXX ±0.10	DRAWN :		PART NO: BHAXXX12DXXABND003
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
X. ±0.50			

4

3

2

1