
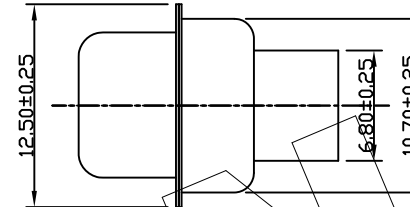


REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-4-25

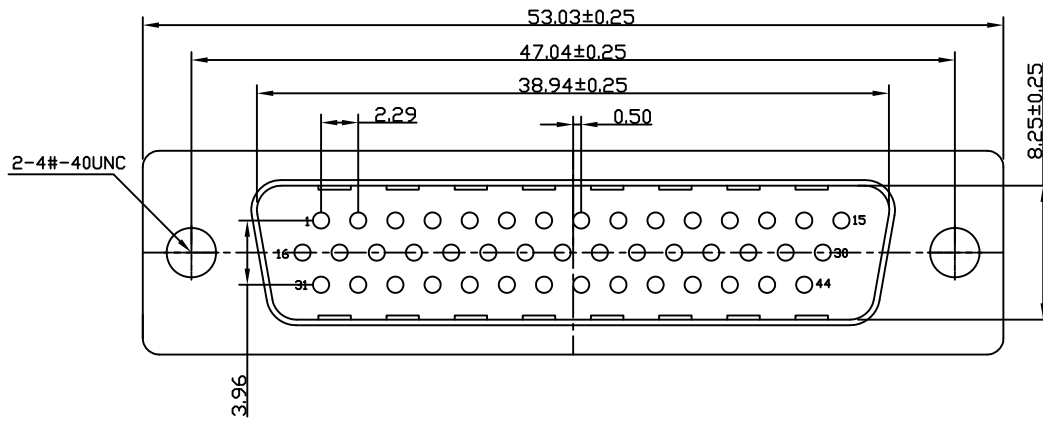


备注:
1.性能:

- 额定电压 :250V
- 额定电流 :3AMP
- 接触阻抗 :30mΩ MAX.
- 绝缘阻抗 :1000MΩ MIN. at 500V DC
- 耐电压 :500V Per minute
- 温度范围 :-55℃~105℃

2.材质:

- 胶芯 :主体PBT+30% G.F(UL94V-0)
后盖PA9T
- 铁壳 :SPCC 前壳电镀镍、后壳电
镀锡
- 弹片 不锈钢

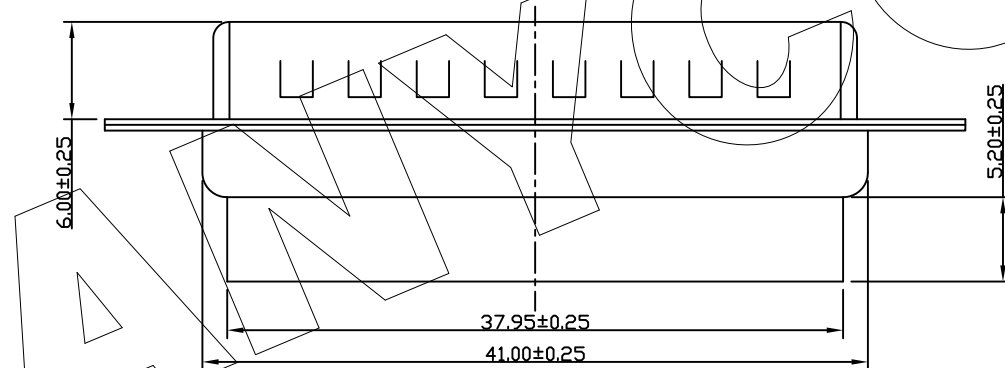

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE: HDEC 44公柳合
ANGLE ±5°	DATE :	2016-4-25	PART NO:
X.XXX ±0.10	DRAWN :	zhang	
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0
X. ±0.50			UNIT: mm
			SCALE: 1:1
			SIZE: A4