


REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-5-26

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: PBT+30%GF UL94V-0 BLACK/WHITE/BLUE
 - 1.2 CONTACT: BRASS $T=0.25\text{mm}$
 - 1.3 BEFORE SHELL: BRASS/SPCC $T=0.30\text{mm}$
 - 1.4 AFTER SHELL: SPCC $T=0.30\text{mm}$
2. FINISH:
 - 2.1 CONTACT: GOLD PLATED ON CONTACT AREA
100 μ " MATTE TIN PLATING ON SOLDER TAIL AREA
50 μ " MIN NICKEL UNDERPLATING OVERALL
 - 2.2 BEFORE SHELL : 100 μ " SEMI-BRIGHT NICKEL PLATING OVERALL
 - 2.3 AFTER SHELL : 100 μ " SEMI-BRIGHT NICKEL PLATING OVERALL
3. SPECIFICATION:
 - 3.1 ELECTRICAL
 - a CURRENT RATING: 1 A MAX
 - b TEMPERATURE RANGE: $-55\text{ }^{\circ}\text{C} \sim 105\text{ }^{\circ}\text{C}$
 - c CONTACT RESISTANCE: 30 MILLIONHM MAX
 - d DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC r.m.s
 - e INSULATION RESISTNACE: 1000 MEGOHMS MIN
 - 3.2 MECHANICAL
 - a INSERTION FORCE:3.57Kg Max.
 - b EXTRACION FORCE:1.02Kg Min.
5. MEET THE RoHS REQUIREMENTS STANDARD.

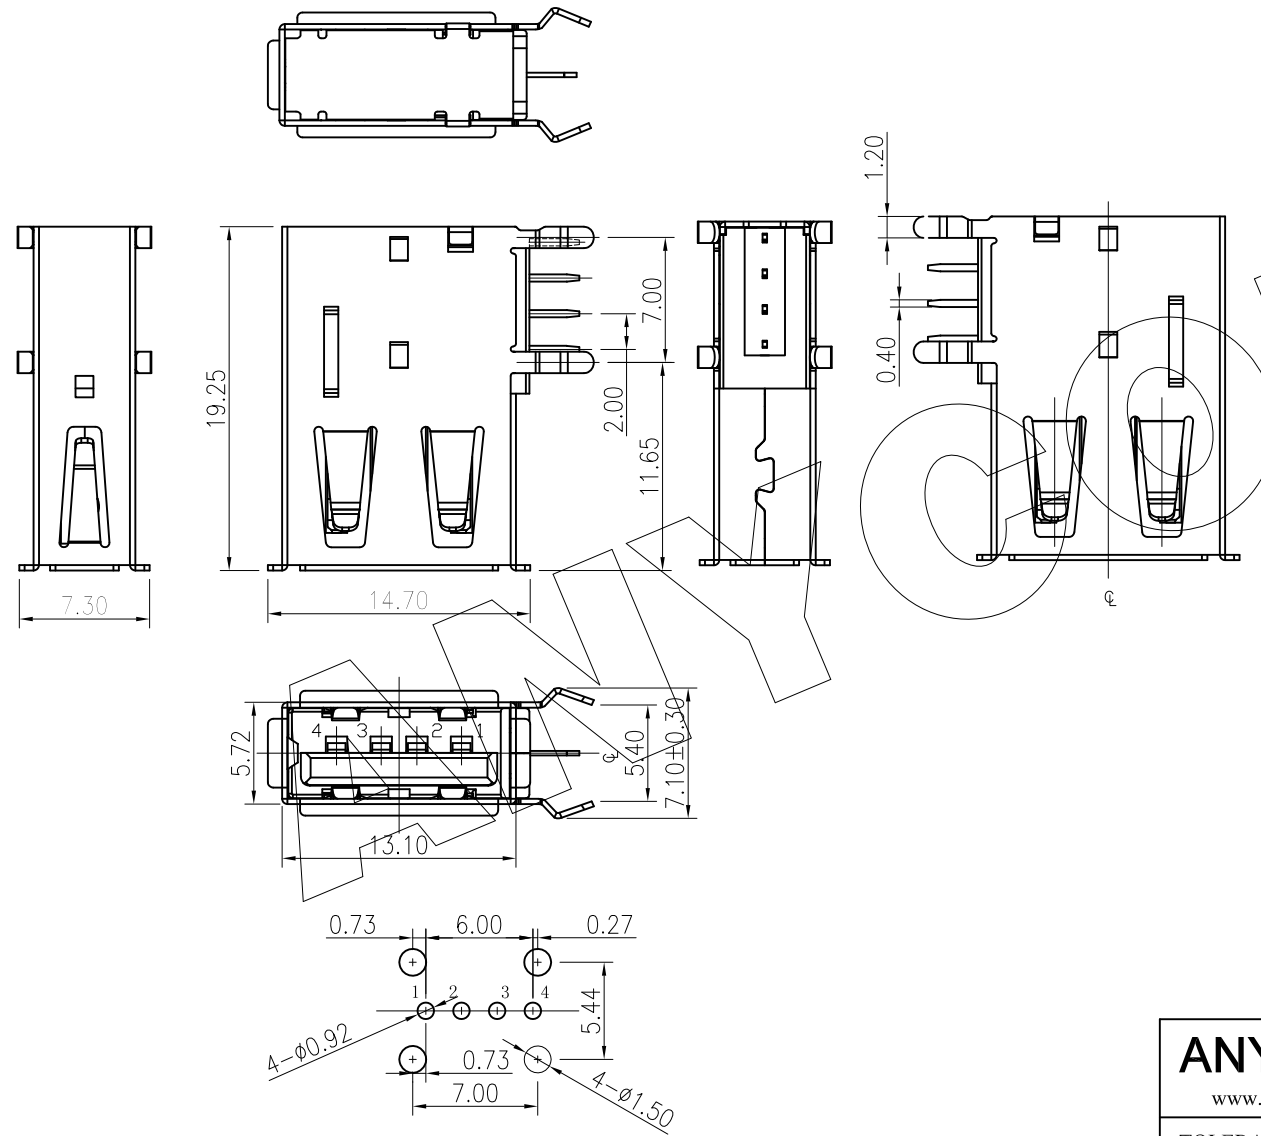

PCB LAYOUT

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE:	USB AF 侧插长体		
ANGLE ±5°	DATE :	2016-5-26				
X.XXX ±0.10	DRAWN :	ZHANG	PART NO:			
X.XX ±0.20	CHECKED :		DRAWING NO:			
X.X ±0.30	APPROVED :		REV:	A0	UNIT:	mm
X. ±0.50			SCALE:	3:1	SIZE:	A4