

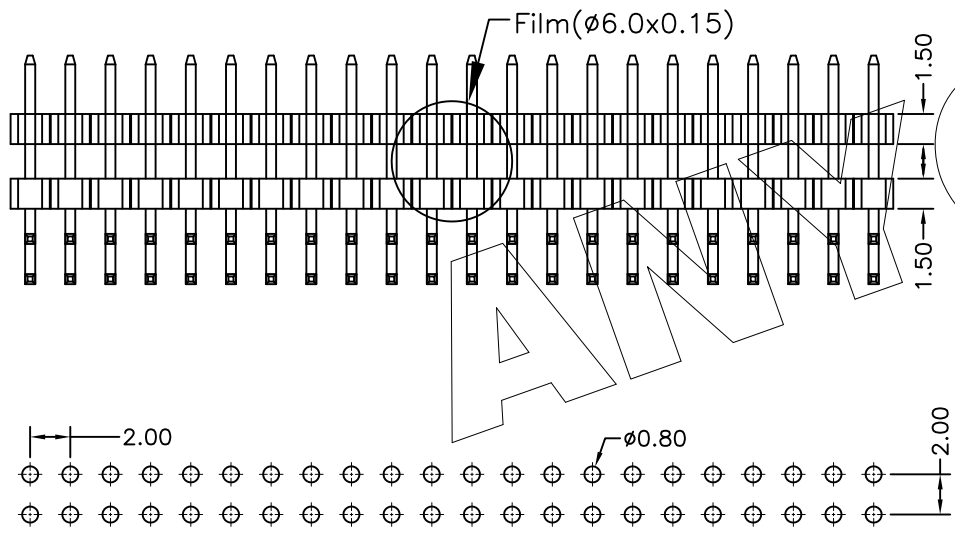


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-03-20

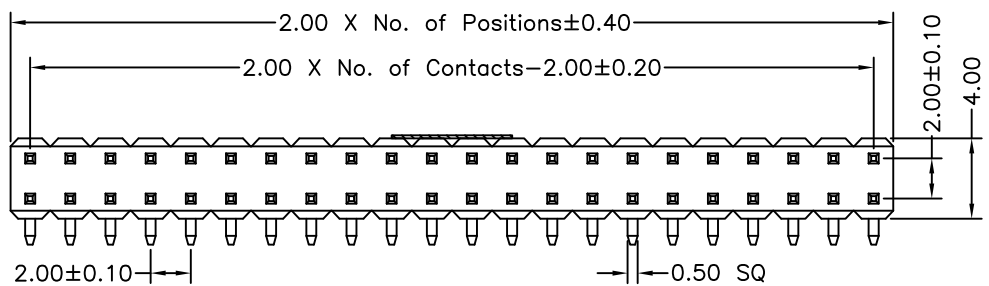

P.C.B LAYOUT

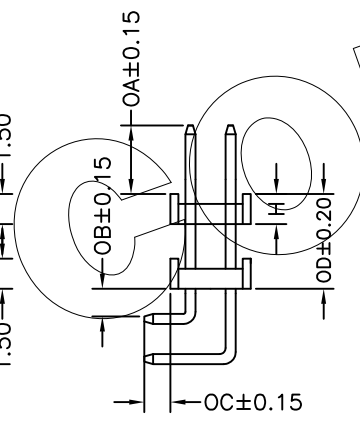

Technical Data

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T or PBT

Electrical:
 Current rating: 1.5Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 450V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C max(PA6T),
 +220°C max(PBT).

P128	22	XXX	XX	R	X	X	N	RXXX
Product Descriptions P128 H=1.5	Product Type 22 Doul Row Doul Base	No. of Positions XXX Poles	Pin Plating G0 Gold Flash G1 1u" Au SN Tin Plated S1 半金锡1u" S2 半金锡2u" S4 半金锡5u"	Angle options R Ringht Angle	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Pin length(mm) L=7.51/11.51 mm

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2012-03-20	PH2.0mm Pin Header H1.5 Dual Row Dual Base Straight W=4.0mm
X.XXX ±0.10	DRAWN :	Sammo	PART NO: P12822XXXXXXXNRXXX
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
X. ±0.50			