

4




3

2

1

## REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2009-12-26

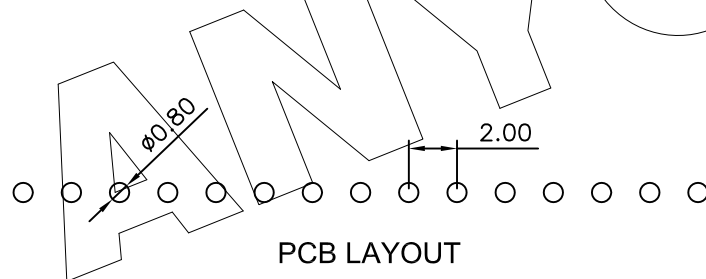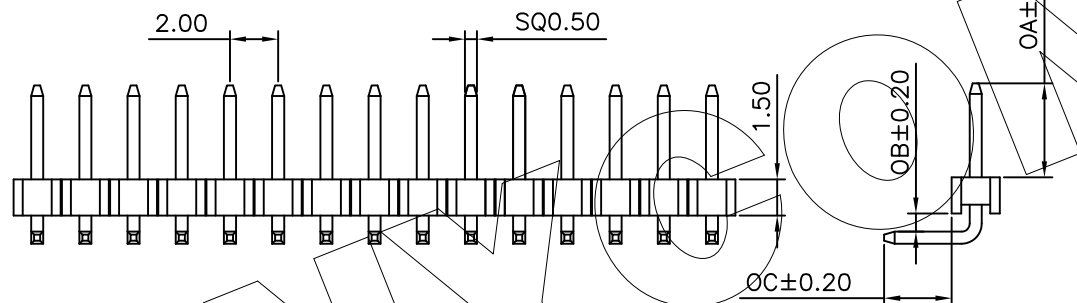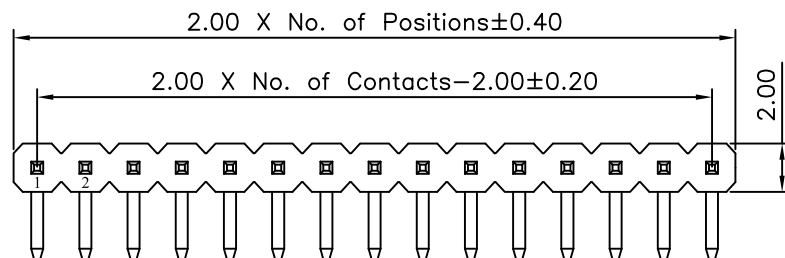

## Technical Data

## Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T or PBT +30%G.F

## Electrical:

Current rating: 1.5Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 450V AC/minute

## Mechanical:

Mechanical life cycle: min.200

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +220°C max(PBT),  
+260°C max(PA6T).

P128

11

XXX

XX

R

X

X

N

RXXX

Product Descriptions  
P128 H=1.5Product Type  
11 Single rowNo. of Positions  
XXX PolesPin Plating  
G0 Gold Flash  
SN Tin PlatedAngle options  
R Right AngleInsulator Material  
A PBT  
B PA66  
C PA6T  
D LCPColor  
B Black  
W White  
L Blue  
G Green  
Y Yellow  
R Red  
N NaturalPin length(mm)  
L=9.95mm

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE : 2009-12-26	PH2.0 H1.5 Single Row Straight Pin Header
X.XXX ±0.10	DRAWN : Heguengfeng	PART NO: P12811XXXXDXXNRXXX
X.XX ±0.20	CHECKED :	DRAWING NO: ANC-P12811XXXXDXXNR001
X.X ±0.30	APPROVED :	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50		

4

3

2

1