| REVISION DATA | | |
|---|---|---|
| REV | DESCRIPTION | DATE |
| A0 | NEW DRAWING | 2013-06-20 |

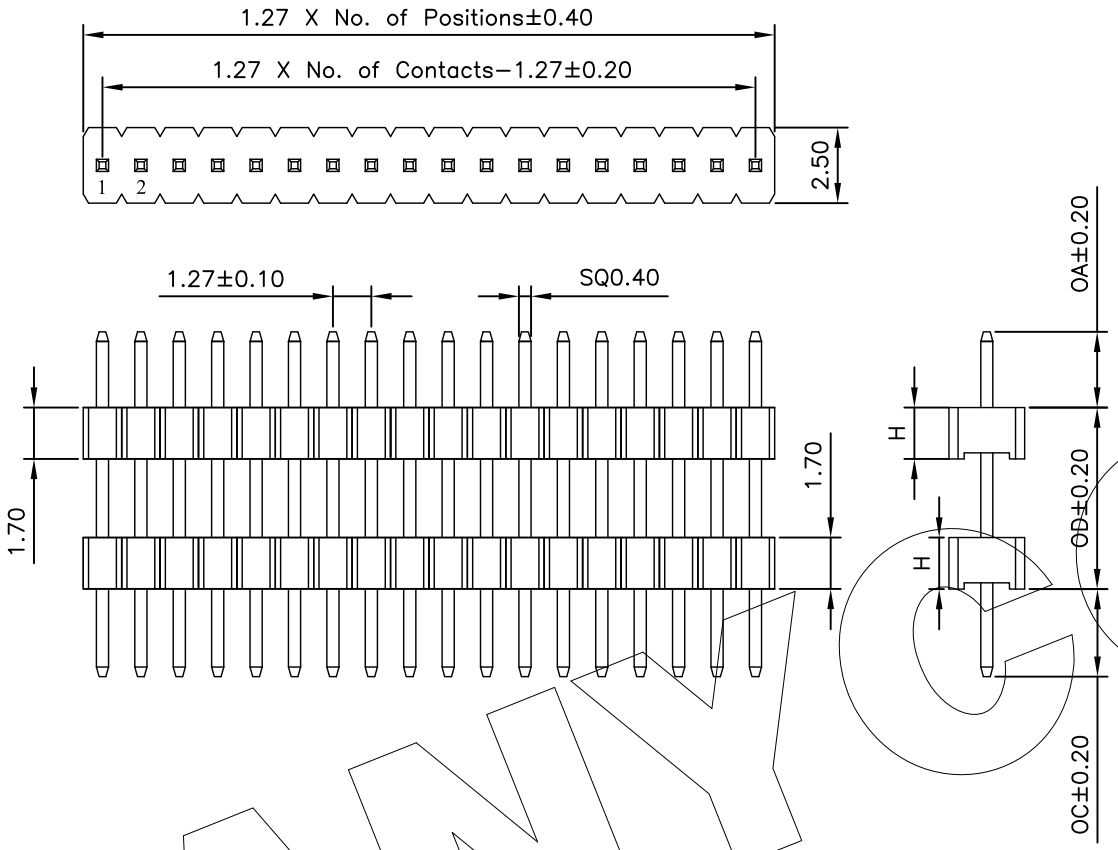


PCB LAYOUT

# Technical Data

Material:
Contact Material: Brass
Contact plating:Au or Sn Over 50μ" Ni
Insulator Material:Black Polyester UL94V-0
Standard:PBT or PA6T +30%G.F

Electrical:
Current rating:1.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage:300V AC/minute

Mechanical:
Mechanical life cycle:min.200
Operaing temperatures: Gold Plated:-55°C to+105°C
Tin plated:-40°C to+105°C
Soldering temperature: +220°C max(PBT).
+260°C max(PA6T).

ANYCONN

| P126 | 11 | XXX | XX | D | X | X | N | DXXX |
|---|---|---|---|---|---|---|---|---|
| Product Descriptions P126 H=1.7 | Product Type 11 Single Row | No. of Positions XXX Poles | Pin Plating G0 Gold Flash SN Tin Plated | Angle options D Straight | Insulator Material A PBT B PA66 C PA6T D LCP | Color B Black W White L Blue G Green Y Yellow R Red N Natural | | Pin length(mm) L=11.4 mm |

**ANYCONN®** 东莞市恩康电子有限公司
www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

| TOLERANCE | PROJECTON | | TITLE: PH1.27 H1.7mm Single Row Straight L11.40mm Pin Header | | | |
|---|---|---|---|---|---|---|
| ANGLE ±5° | DATE : | 2013-06-20 | | | | |
| X.XXX ±0.10 | DRAWN : | Zhang | PART NO: P12611XXXXXDXXNDXXX | | | |
| X.XX ±0.20 | CHECKED : | | DRAWING NO: | | | |
| X.X ±0.30 | APPROVED : | | REV: A0 | UNIT: mm | SCALE: 3:1 | SIZE: A4 |
| X. ±0.50 | | | | | | |