

4




3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-07-30

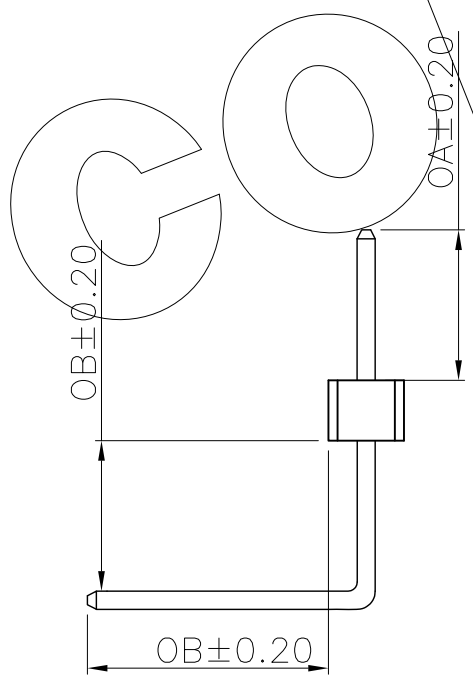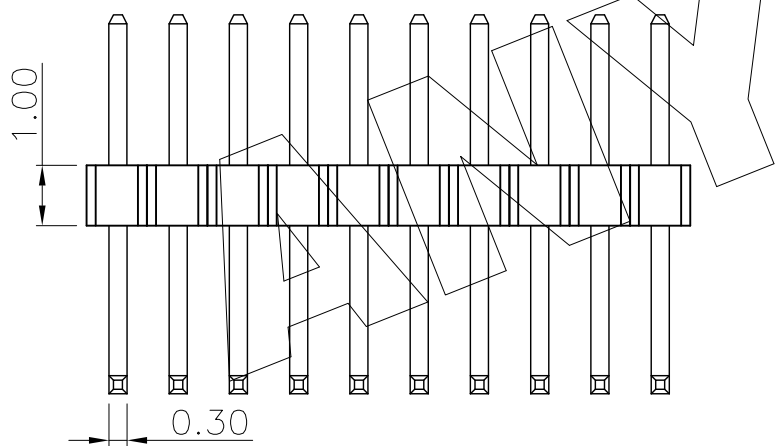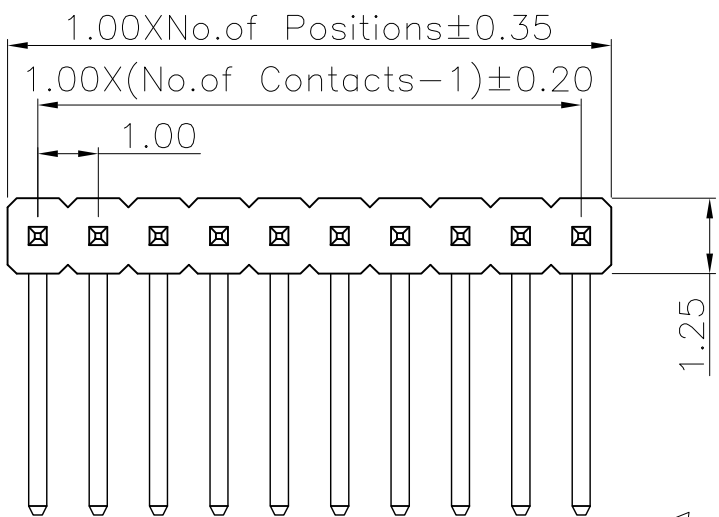


Technical Data

Material:
 Insulator Material:Polyester UL94V-0
 Standard:PA6T

Electrical:
 Current rating: 1Amp
 Contact resistance: 20mΩ Max
 Insulation resistance: 1000MΩ Min
 Withstanding Voltage:500V AC/minute

Mechanical:
 Operaing temperatures:-40°C to+105°C

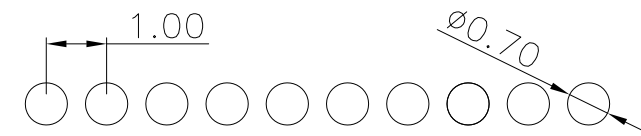

P.C.B LAYOUT

P125	11	XXX	XX	R	X	X	N	RXXX
Product Descriptions P125 H=1.0	Product Type 11 Single row	No. of Positions XXX Poles	Pin Plating G0 Gold Flash SN Tin Plating	Angle options R Right Angle	Insulator Material A PBT C Nylon-6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Pin length(mm) L=10.65mm

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: PH1.0 H1.0 Single Row Right Angle Pin Header
ANGLE ±5°	DATE :	2011-07-30	PART NO: P12511XXXXXXNRXXX
X.XXX ±0.10	DRAWN :	Lijunhua	DRAWING NO:
X.XX ±0.20	CHECKED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X.X ±0.30	APPROVED :		
X. ±0.50			

4

3

2

1