


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2012-10-19

### Technical Data




Material:  
 Contact Material: Brass  
 Contact plating: Au or Sn Over 50μm Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: PBT or PA6T +30%G.F

Electrical:  
 Current rating: 3.0Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 1000V AC/minute

Mechanical:  
 Mechanical life cycle: min.200  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C  
 Soldering temperature: +220°C max(PBT).  
 +260°C max(PA6T).

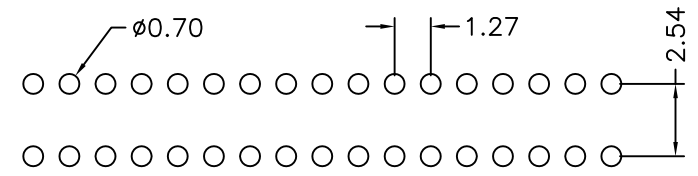

**P.C.B LAYOUT**

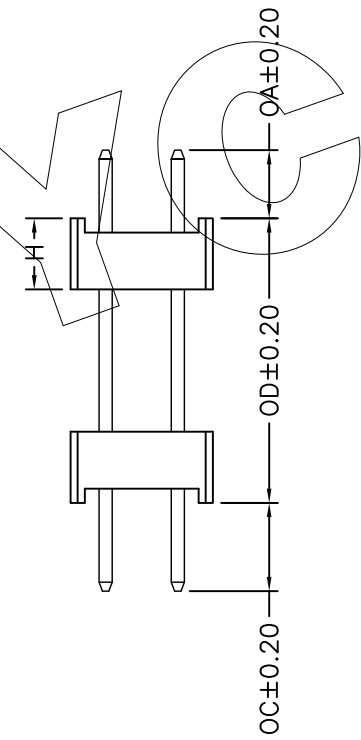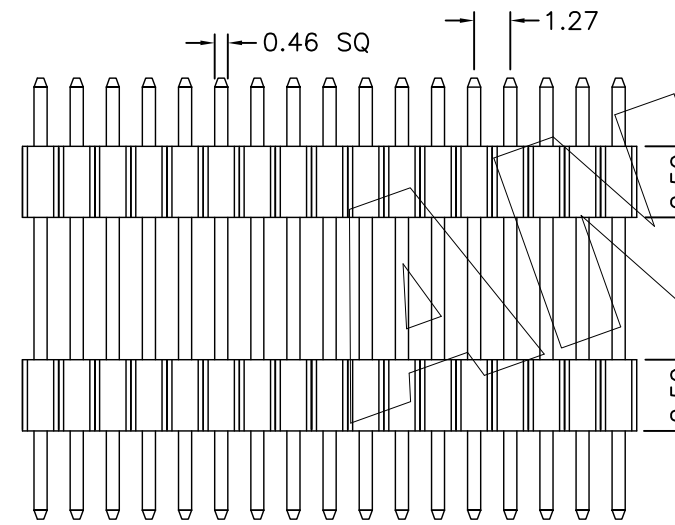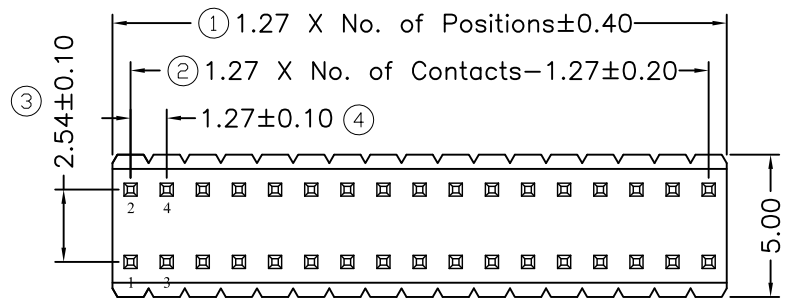

<b>P117</b>	<b>22</b>	<b>XXX</b>	<b>XX</b>	<b>D</b>	<b>X</b>	<b>X</b>	<b>N</b>	<b>D001</b>
Product Descriptions P117 H=2.54	Product Type 22 Double row Double Base	No. of Positions XXX Poles	Pin Plating G0 Gold Flash SN Tin Plated	Angle options D Straight	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Pin length(mm) L=15.5mm 塑胶反向

**ANYCONN® 东莞市恩康电子有限公司**  
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: Pitch: 1.27*2.54mm Pin Header Dual Row Straight Dip Type
ANGLE ±5°	DATE :	2012-10-19	PART NO: P11722XXXXDXND001
X.XXX ±0.10	DRAWN :	kanggc	DRAWING NO:
X.XX ±0.20	CHECKED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
X.X ±0.30	APPROVED :		
X. ±0.50			