
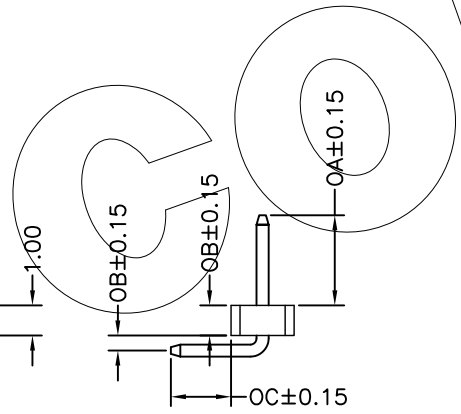
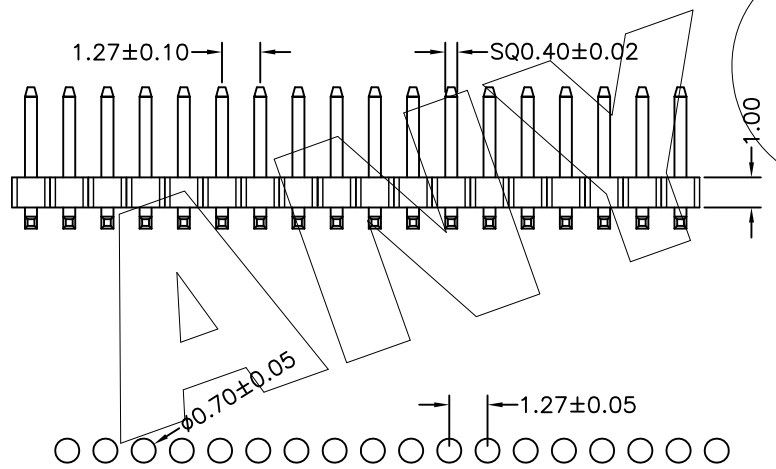


| REVISION DATA | | |
|---------------|-------------|------------|
| REV | DESCRIPTION | DATE |
| A0 | NEW DRAWING | 2012-10-19 |

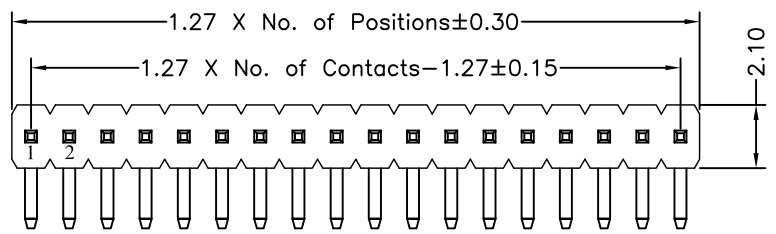

PCB LAYOUT

Technical Data

Material:
 Contact Material: Brass
 Contact plating: See the part NO.
 Insulator Material: Black Polyester UL94V-0
 Standard: See the part NO.

Electrical:
 Current rating: 1.0Amps/contact max.
 Contact resistance: ≤ 20mΩ/contact
 Insulation resistance: ≥ 1000MΩ at V=100V
 Withstanding Voltage: 500V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

Soldering temperature: +260°C max

Packing: Tube

| | | | | | | | | |
|------------------------------------|-------------------------------|-------------------------------|---|---------------------------------|--|------------------|---|---------------------------|
| P113 | 11 | XXX | XX | R | X | B | N | RXXX |
| Product Descriptions P113 H=1.0 | Product Type 11 Single Row | No. of Positions XXX Poles | Pin Plating G0 Gold Flash SN Tin plated | Angle options R Ringht Angle | Insulator Material A PBT+G/F30% B PA66+G/F30% C PA6T+G/F30% D LCP+G/F30% | Color B Black | | Pin length(mm) L=7.3mm |

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

| | | | |
|-------------|------------|------------|--|
| TOLERANCE | PROJECTON | | TITLE: PH1.27 H1.0mm Single Row Ringht Angle L7.3mm Pin Header |
| ANGLE ±5° | DATE : | 2012-10-19 | PART NO: P11311XXXXRXXXNRXXX |
| X.XXX ±0.10 | DRAWN : | kanggc | DRAWING NO:EP-P11311-009 |
| X.XX ±0.20 | CHECKED : | | REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4 |
| X.X ±0.30 | APPROVED : | | |
| X. ±0.50 | | | |