


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-03-07

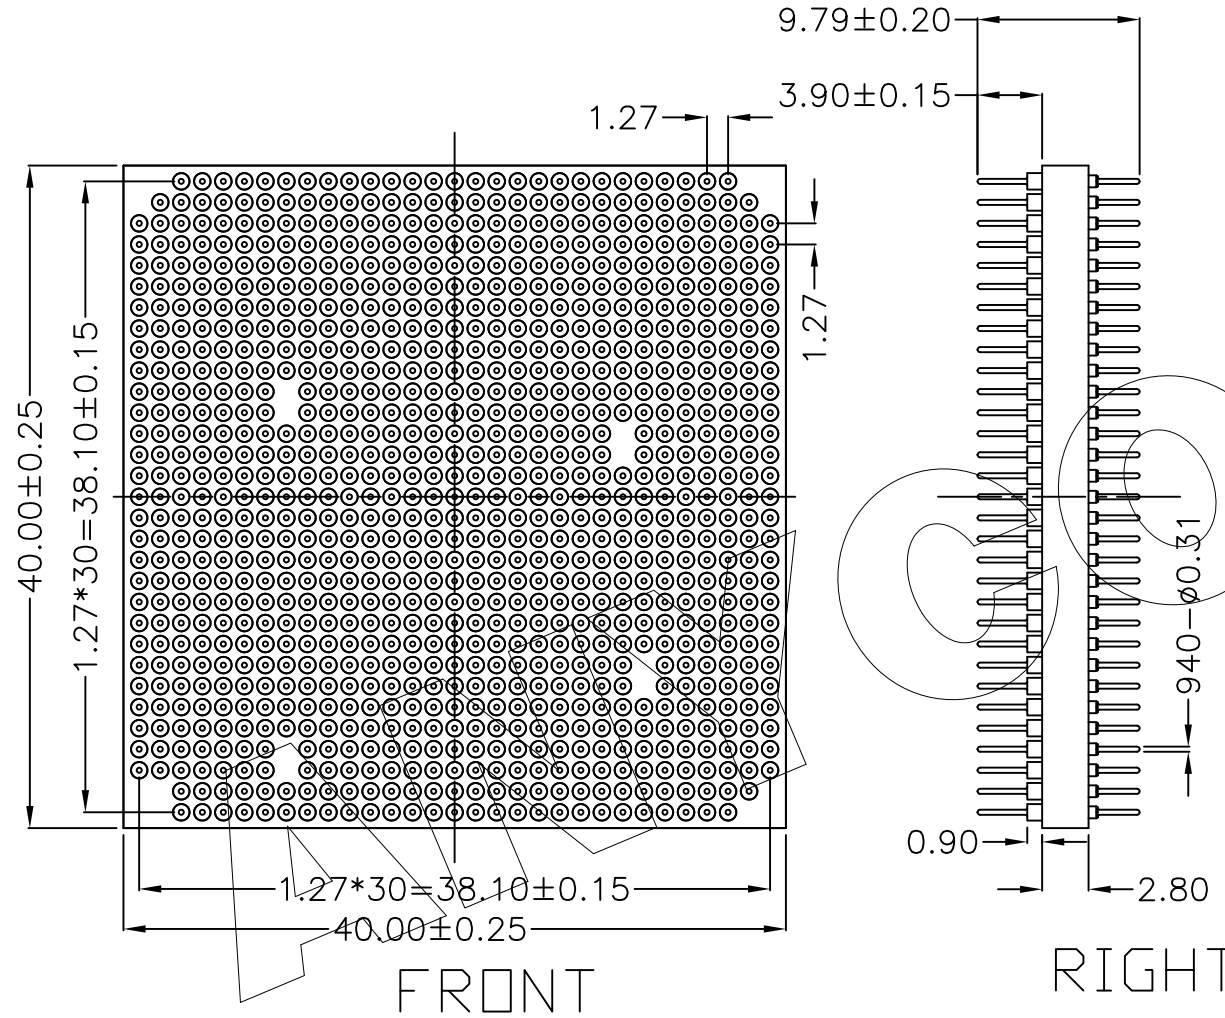

Technical Data

Material :Brass, Screw Machined
 Pin :CuZn38Pb2
 Outer sleeve (contact 6-finger) :3μ Gold Plated over Nickel
 Plating(Sleeve) :FR-4
 Insulator Body :FR-4

Electrical
 Current rating :3Amps/contact max.
 Contact resistance: ≤4mΩ/contact
 Insulation resistance: ≥1KMΩ at V=100V
 Operating Voltage: 60VAC/DC

Mechanical
 Operating temperature(continuous): -55°C + 125°C
 Soldering temperature: +260°C, 10s max.

Features
 Low insertion force socket, 6 fingers contacts
 Closed end construction for 100% anti-wicking of solder.

PGA

940	1	1	X	00	0979A	3	A	00
No. of Positions 940 940Positions	Pitch(mm) 1 1.27mm 2 2.54mm 3 1.27*2.54mm 4 1.0mm S Special	Insulator type 1 FR-4 2 PPS S Special	Pin plated 0 No 1 Tin120μ 锡 2 Tin200μ 3 Gold0.4μ 金 4 Gold0.8μ 5 Gold1μ 6 Gold1.5μ 7 Gold2μ 8 Gold3μ 9 Gold5μ A Gold8μ B Gold10μ C Gold15μ D Gold30μ E Ag plated F Nickel 80μ	Clip Plated 0 No 1 Tin120μ 锡 2 Tin200μ 3 Gold0.4μ 金 4 Gold0.8μ 5 Gold1μ 6 Gold1.5μ 7 Gold2μ 8 Gold3μ 9 Gold5μ A Gold8μ B Gold10μ C Gold15μ D Gold30μ E Ag plated F Nickel 80μ	Pin length(mm) 0460A 4.60mm 0485A 4.85mm 0515A 5.15mm 0550A 5.50mm 0979A 9.79mm S Special	Insulator Color 1 Black 黑色 2 Brown 褐色 3 White 白色 4 Yellow 黄色 S Special	Insulator type A/B/C A 窄面板 40.0 x40.0	Series 00 No

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE ANGLE ±5° X.XXX ±0.10 X.XX ±0.20 X.X ±0.30 X. ±0.50	PROJECTON		TITLE: 1.27mmPitch PGA Socket 940Pins Pin Length 9.79mm
	DATE :	2011-03-07	PART NO: PGA94011X000979A3A00
	DRAWN :	Jason	DRAWING NO: ANC-PGA94011X000979A3A00
	CHECKED :		REV: A0 UNIT: mm SCALE: 1:1 SIZE: A4
APPROVED :			