

4

3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-11-23

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Plating(contact): Gold Flash

Insulator black(housing): PPS (UL94V-0)

Electrical:

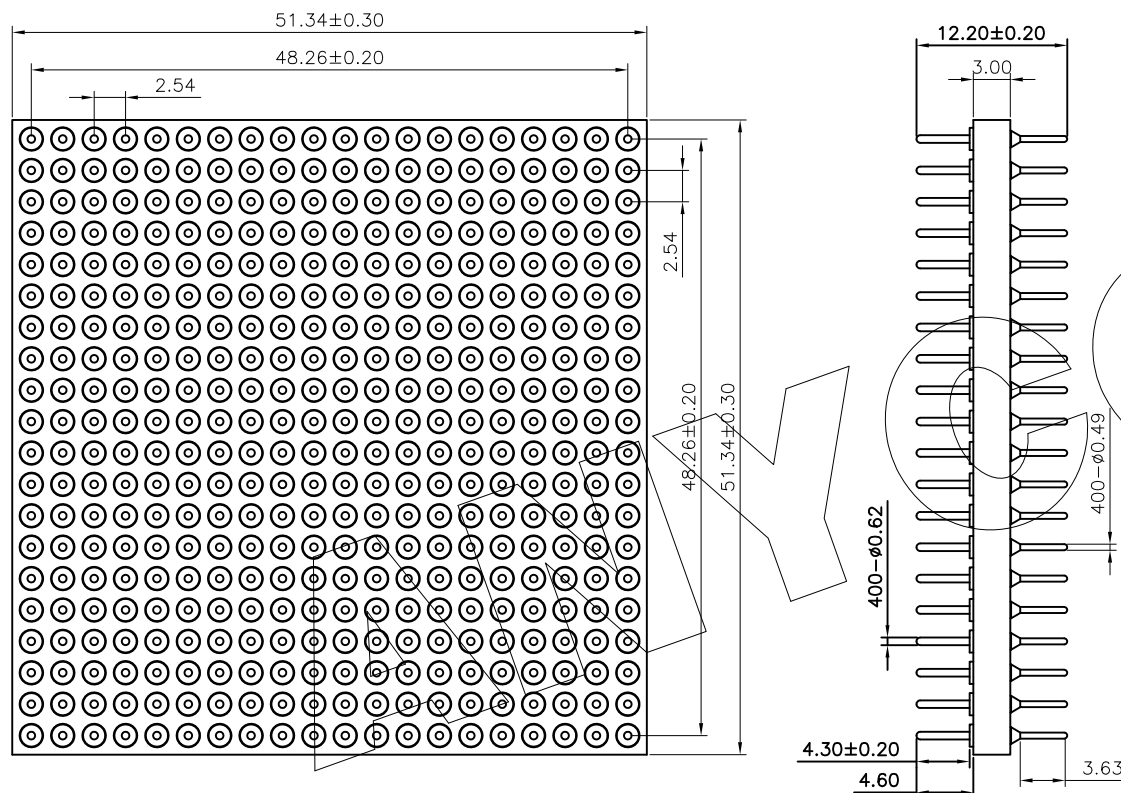
Current rating: 3Amps/contact max.

Contact resistance: $\leq 4m\Omega$ /contactInsulation resistance: $\geq 1000\Omega$ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle:min.200

Operating temperature(continuous): $-55^{\circ}\text{C} + 125^{\circ}\text{C}$ Soldering temperature: $+260^{\circ}\text{C}$, 10s max.

PGA

400	2	2	X	00	1220A	1	A	00
No. of Positions 400Positions	Plcth(mm) 1 1.27mm 2 2.54mm 3 1.27/2.54mm 4 1.0mm S Spedal	Insulator type 1 FR-4 2 PPS S Spedal	Pin plated 0 No 1 Tin120 μ m 锡 2 Tin200 μ m 锡 3 Gold0.4 μ m 金 4 Gold0.8 μ m 金 5 Gold1 μ m 金 6 Gold1.5 μ m 金 7 Gold2 μ m 金 8 Gold3 μ m 金 9 Gold5 μ m 金 A Gold8 μ m 金 B Gold10 μ m 金 C Gold15 μ m 金 D Gold30 μ m 金 E Ag plated 银 F Nickel 80 μ m 镍	Clip Plated 00 No 1 Tin120 μ m 锡 2 Tin200 μ m 锡 3 Gold0.4 μ m 金 4 Gold0.8 μ m 金 5 Gold1 μ m 金 6 Gold1.5 μ m 金 7 Gold2 μ m 金 8 Gold3 μ m 金 9 Gold5 μ m 金 A Gold8 μ m 金 B Gold10 μ m 金 C Gold15 μ m 金 D Gold30 μ m 金 E Ag plated 银 F Nickel 80 μ m 镍	Pin length(mm) 1220A 12,20mm S Spedal	Insulator Color 1 Black黑色 2 Brown褐色 3 White白色 4 Yellow黄色 S Special	Insulator type A/B/C A 普通	Series 00 NO

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE: 2.54mmPitch PGA Socket 400 Pins Pin Length 12.20mm
ANGLE $\pm 5^{\circ}$	DATE :	2010-11-23	PART NO: PGA40022X001220A1A00
X.XXX ± 0.10	DRAWN :	Jason	
X.XX ± 0.20	CHECKED :		DRAWING NO:
X.X ± 0.30	APPROVED :		REV: A0
X. ± 0.50			UNIT: mm
			SCALE: 2:1
			SIZE: A4

4

3

2

1