


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-05-24

Technical Data

Material:
 Contact Material: Brass
 Insulator Material: Black Polyester UL94V-0
 Standard: PBT or PA6T +30%G.F

Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 500V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +220°C, 10s max(PBT).
 +260°C, 10s max(PA6T).

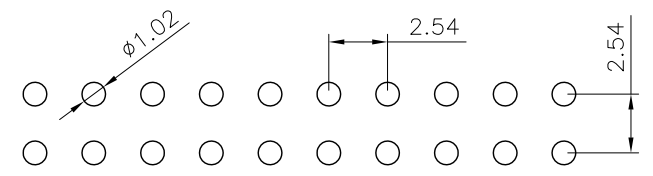

P.C.B LAYOUT

F139	12	XXX	XX	R	X	B	F	R	01
Product Descriptions F139 H=8.5	Product Type 12 Dual row	No. of Positions XXX Poles	Pin Plating G1 Gold 1u" SN Tin Plated	Angle options R Right Angle	Insulator Material A PBT B PA66 C PA6T	Color B Black		Series NO.	

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE:
ANGLE $\pm 5^\circ$	DATE :	2010-05-24	PH2.54 H8.50mm Right Angle Dual Row Female Header
X.XXX ± 0.10	DRAWN :	Fuqianshan	PART NO: F13912XXXXRXXXX
X.XX ± 0.20	CHECKED :		DRAWING NO:
X.X ± 0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ± 0.50			