

4




3

2


1

## REVISION DATA


REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-06-05

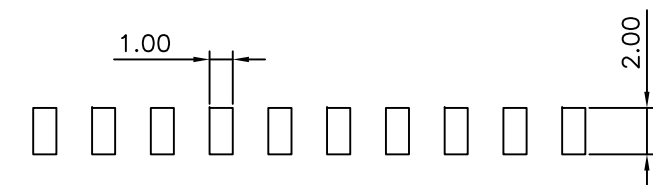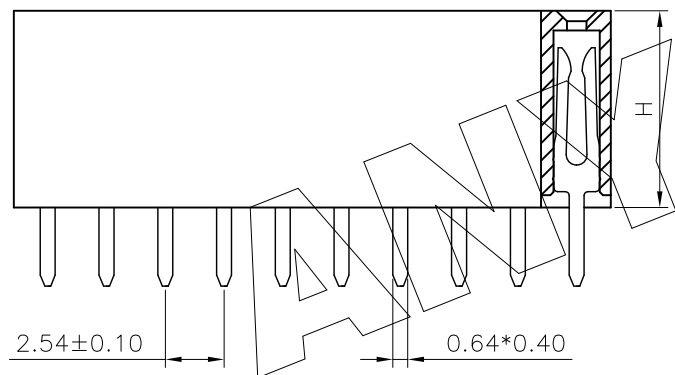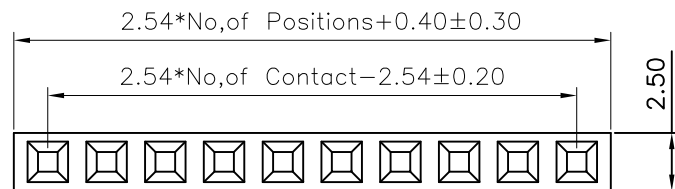

P.C.B LAYOUT

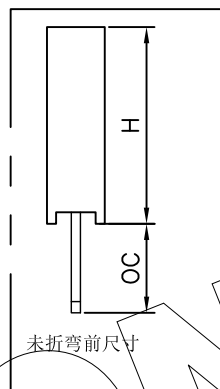

未折弯前尺寸



## Technical Data

Material:  
 Contact Material: Brass  
 Contact plating: Au or Sn Over 50μ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: PA6T +30%G.F

Electrical:  
 Current rating: 3.0Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 1000V AC/minute

Mechanical:  
 Mechanical life cycle: min.200  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C  
 Soldering temperature: +260°C max(PA6T)

F134	11	XXX	XX	H	X	X	N	A	00
------	----	-----	----	---	---	---	---	---	----

Product Descriptions	Product Type	No. of Positions	Pin Plating	Angle options	Insulator Material	Color	Series NO.
	11 Single Row	XXX Poles	G1 Gold 1u" SN Sn120u"	H H-SMT	A PBT B PA66 C PA6T D LCP E PA46 F PA9T	B 黑色 W 白色 L 蓝色 G 绿色 Y 黄色 R 红色 N 本色	

**ANYCONN®** 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE : 2010-06-05	PH2.54 H8.50mm Single Row H-SMT Female Header
X.XXX ±0.10	DRAWN : Fuqianshan	PART NO: F13411XXXXXXHXXNA00
X.XX ±0.20	CHECKED :	DRAWING NO:
X.X ±0.30	APPROVED :	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50		

4

3

2

1