

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-11-06



### Technical Data

**Material:**  
 Contact Material: Brass  
 Contact plating: Au or Sn Over 50μ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: PBT or PA6T +30%G.F

**Electrical:**  
 Current rating: 3.0Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 1000V AC/minute

**Mechanical:**  
 Mechanical life cycle: min.200  
 Operating temperatures: Gold Plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C  
 Soldering temperature: +220°C max(PBT)  
 +260°C max(PA6T)

Packing: Tray

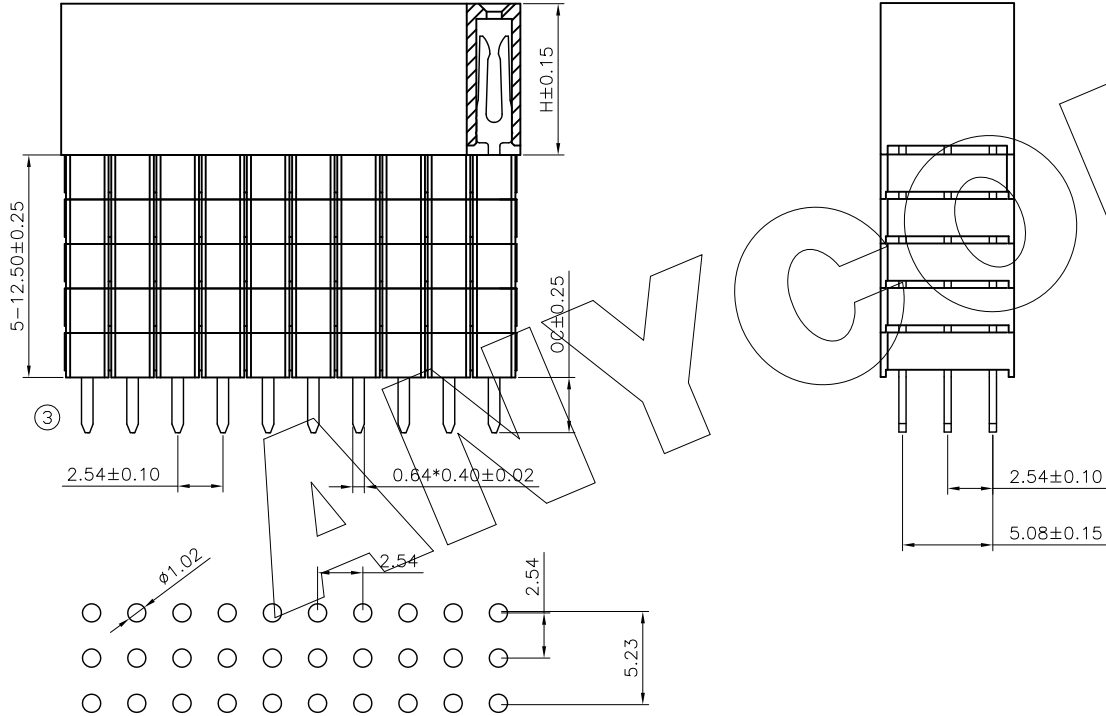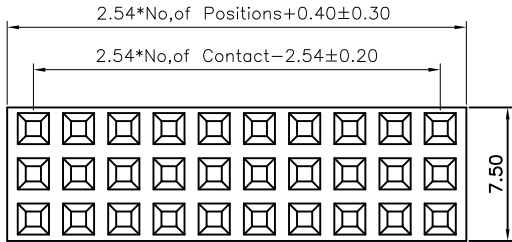

P.C.B LAYOUT

F134	13	XXX	XX	D	X	B	N	A	00
Product Descriptions F134 H=8.5	Product Type 12 Triple Row	No. of Positions XXX Poles	Pin Plating G1 Gold 1u" SN Sn120u"	Angle options D Straight	Insulator Material A PBT C PA6T	Color B Black		Series NO. A OC=3.10	

**ANYCONN®** 东莞市恩康电子有限公司  
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: PH2.54 H8.50mm Triple Row Straight Female Header
ANGLE ±5°	DATE :	2010-11-06	PART NO: F13463XXXXDXBNA00
X.XXX ±0.10	DRAWN :	james	DRAWING NO:
X.XX ±0.20	CHECKED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X.X ±0.30	APPROVED :		
X. ±0.50			