


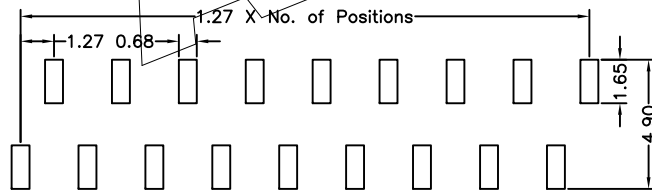



B Type

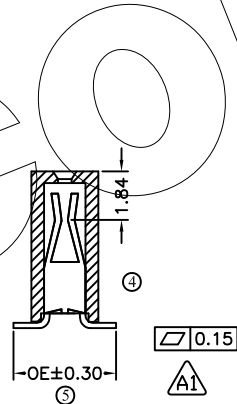

A Type

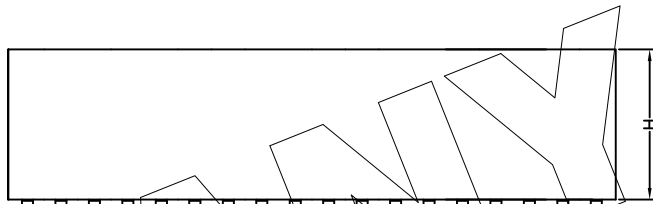

A Type PCB LAYOUT

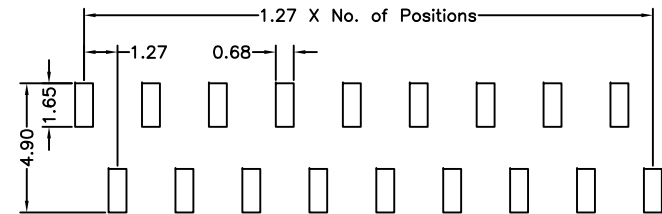

B Type PCB LAYOUT

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-07

Technical Data

Material:
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T +30%G.F

Electrical:
 Current rating: 1.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C max(PA6T)

F117	11	XXX	XX	X	X	X	N	A	00
Product Descriptions	Product Type 11 Single Row	No. of Positions XXX Poles	Pin Plating G1 Gold 1u" SN Tin Plated	Angle options A A Type B B Type	Insulator Material C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural		Series NO.	

ANYCONN® 东莞市恩康电子有限公司

www.enkcom.com

DONGGUAN ANYCONN ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE: Pitch 1.27*2.54 H5.70mm Single Row SMT Type Female Header
ANGLE ±5°	DATE :	2011-04-07	PART NO: F11711XXXXXXXXXA00
X.XXX ±0.10	DRAWN :	hejg	
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A1
X. ±0.50			UNIT: mm
			SCALE: 1:1
			SIZE: A4