




REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-06-25

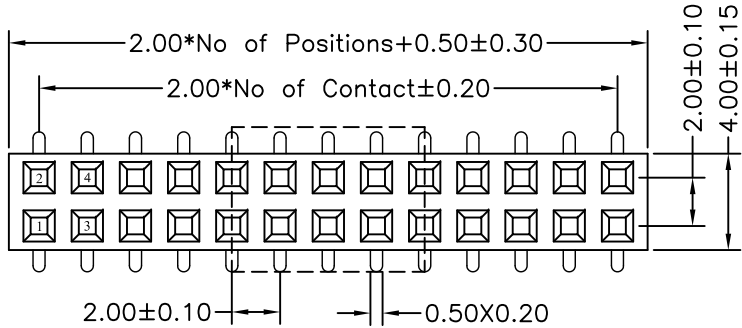

Without Peg

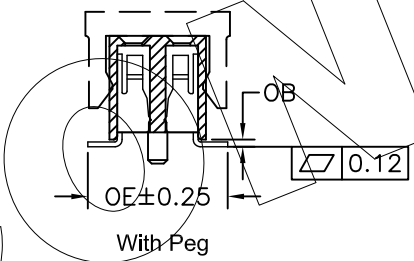



With Peg

### Technical Data

**Material:**  
**Contact Material:** Phosphor Bronze  
**Contact plating:** Au or Sn Over 50μ" Ni  
**Insulator Material:** Black Polyester UL94V-0  
**Standard:** PA6T +30%G.F

**Electrical:**  
**Current rating:** 1.5Amps/contact max.  
**Contact resistance:** ≤20mΩ/contact  
**Insulation resistance:** ≥1000MΩ at V=100V  
**Withstanding Voltage:** 450V AC/minute

**Mechanical:**  
**Mechanical life cycle:** min.200  
**Operating temperatures:** Gold Plated: -55°C to +105°C  
**Tin plated:** -40°C to +105°C  
**Soldering temperature:** +260°C 10s max (PA6T)

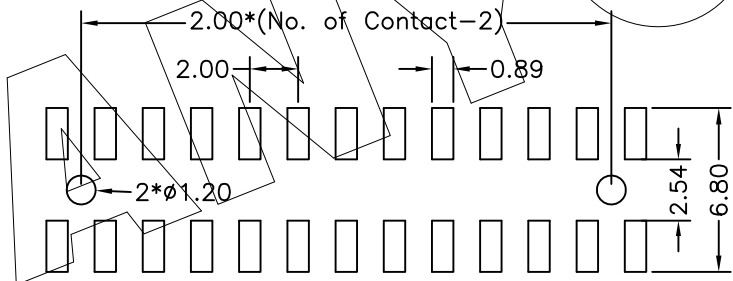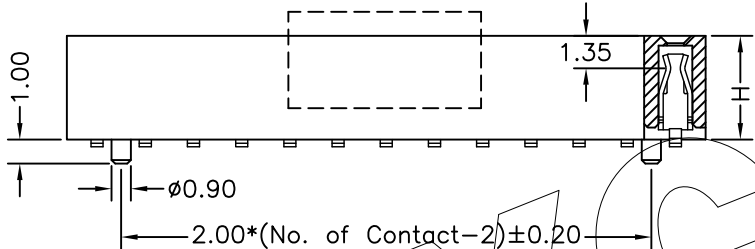

**P.C.B LAYOUT**

F122	12	XXX	XX	S	X	X	X	B	00
Product Descriptions	Product Type 12 Dual Row	No. of Postions XXX Poles	Pin Plating G0 Gold Flash G1 Gold 1u" SN Tin Plated	Angle options S SMT	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black W White L Blue G Green Y Yellow R Red N Natural	N Without Peg W With Peg	Series NO.	

**ANYCONN® 东莞市恩康电子有限公司**  
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: Pitch2.0 H4.3mm Dual Row SMT Female Header
ANGLE ±5°	DATE :	2015-06-25	PART NO: F12212XXXXXXB00
X.XXX ±0.10	DRAWN :	Songjun	DRAWING NO:
X.XX ±0.20	CHECKED :		REV: A1 UNIT: mm SCALE: 3:1 SIZE: A4
X.X ±0.30	APPROVED :		
X. ±0.50			