



PCB Layout



无柱

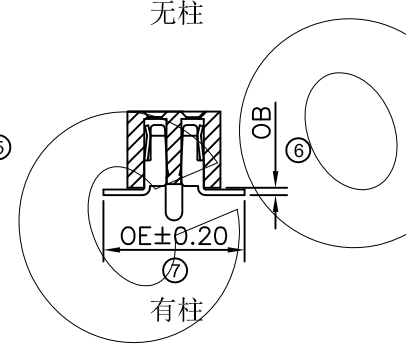

有柱

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-06-04

Technical Data

Material:
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:
 Current rating: 0.75Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Operating temperatures: Gold Plated: -55°C to +105°C
 Tin plated: -40°C to +105°C
 Soldering temperature: +260°C, 10s max.

F112	12	XXX	G1	S	C	B	X	A	00
Product Descriptions	Product Type 12 Dual Row	No. of Positions XXX Poles	Pin Plating G1 Gold 1u" SN Tin Plated	Angle options S SMT	Insulator Material C PA6T	Color B Black	N No W with Peg	Series NO.	

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE: PH1.0 H2.1 Dual Row SMT Female Header
ANGLE ±5°	DATE :	2010-06-04	PART NO: F11212XXXG1SCBXA00
X.XXX ±0.10	DRAWN :	Fuqianshan	
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0
X. ±0.50			UNIT: mm
			SCALE: 3:1
			SIZE: A4