


P.C.B. LAYOUT

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-07-06

Technical Data:

- Material:
- Contact(metal housing): Brass Stamping
- Terminal screw: Steel galvanized and chromated or Nickel plated or Tin plated (standard) (option)
- Wire guard: Copper Alloy
- Surface of solder tail: Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)
- Electrical
- Voltage rating: 300VAC
- Current rating: 8 Amps/way max
- Insulation resistance: 5000M Ω /1000V
- Withstanding Voltage: 1500VAC(1min) Test time=60sec/1pcs
- Wire range: 14-26AWG
- Torgue: 4kgf.cm/M2.5
- Mechanical:
- Operating temperature: -30°Cto+105°C
- Soldering reliability:
- Test temperature= 250°C±10°C/5 seconds max

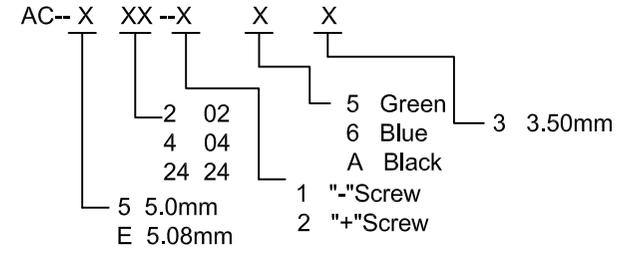

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON		TITLE:	AC 5.0mm Series
ANGLE ±5°	DATE :	2015-07-06	PART NO:	AC5XX2X3A
X.XXX ±0.10	DRAWN :	Songjun	DRAWING NO:	
X.XX ±0.20	CHECKED :		REV:	A1
X.X ±0.30	APPROVED :		UNIT:	mm
X. ±0.50			SCALE:	3:1
			SIZE:	A4