


PCB Layout

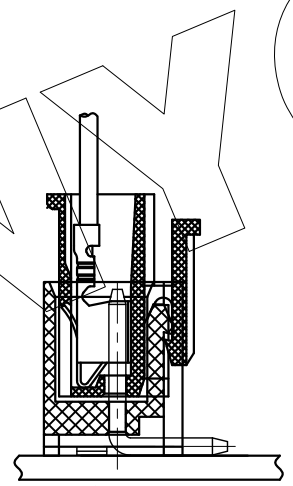

PCB Layout

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2016-5-26

备注:
 1. 电气性能:
 1-1. 额定电流: 1.0A
 1-2. 额定电压: 250V
 1-3. 耐压: 1000V
 1-4. 接触电阻: 30mΩ
 1-5. 绝缘电阻: 1000MΩ
 2. 工作温度: -20℃~+85℃
 3. 环境管控:
 3-1. 禁止使用含有SS-00259所限制的物质。
 3-2. 对应的SGS或ITS出具的ICP-AES数据, 不可测定物质的成分表, 在一年有效期内。

Pin	A	B	C
2	3.96	11.88	8.6
3	7.92	15.84	12.56
4	11.88	19.8	16.52
5	15.84	23.76	20.48
6	19.8	27.72	24.44
7	23.76	31.68	28.4
8	27.72	35.64	32.36
9	31.68	39.6	36.32
10	35.64	43.56	40.28

ITEM	PART NO:	COMPONENT	Q'TY	MATERIAL	FINISH
3	PH.02	/	/	/	Phosphor bronze 镍底20u"-40u", 镀锡50u"-80u"
2	VHR.02	/	/	/	Bronze 镍底20u"-40u", 镀锡50u"-80u"
1	VHR.01	/	/	/	Plastic PA9T(米黄色)

WF	D	R	11	XXX	XX	X	N	RXXX
Pitch D PH3.96	R 90°	XX Positions	XXX Positions	G0 Gold Flash SN Tin Plated	Insulator Material A PBT B PA66 C PA6T P PC F PA9T	W With peg N NO Peg L With lock T Fixed tabs		RXXX

ANYCONN® 东莞市恩康电子有限公司
 www.enkcom.com **DONGGUAN ANYCONN ELECTRONICS CO.,LTD**

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE: 2016-5-26	VHR-nAB
X.XXX ±0.10	DRAWN: ZHANG	PART NO: WFDR11XXXXXXXXNRXXX
X.XX ±0.20	CHECKED:	DRAWING NO:
X.X ±0.30	APPROVED:	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50		